

# PRODUCT DATASHEET

## FL PFM ASYM 55x110 200 W 3000 K BK

FLOODLIGHT PERFORMANCE ASYM 55x110 | Floodlight with wide beam, asymmetric light distribution for various application areas



### Areas of application

- Direct replacement for luminaires using HID lamps
- Outdoor use (IP66)
- Parking
- Public areas
- Industry
- Sports facilities
- Architectural lighting
- D-sign according to EN 60598-2-24 for fire-risk commercial unit, e.g. by accumulation of dust

### Product benefits

- Energy savings of up to 90 % compared to halogen lamp floodlights
- Energy savings of up to 45 % compared to luminaires that use conventional discharge lamps
- Bright, robust and durable
- Homogeneous luminance distribution and reduced glare
- No upper light output ratio (ULOR 0%) when mounted at 0° tilt
- Key hole to ensure ease of installation
- 5 years guarantee

### Product features

- High luminous efficacy: up to 140 lm/W
- Asymmetric light distribution for various application areas
- Angled (45°) mounting bracket and up to 180° tilting
- Type of protection: IP66
- Impact resistance: IK08



- Ambient temperature in operation: -30...+50 °C
- High surge protection: up to 10 kV (L/N-PE), 6 kV (L-N)
- Integrated breather for preventing condensation inside the luminaire
- Connection via 2 m cable, wiring required


---

**TECHNICAL DATA****Electrical data**


|                                                             |                       |
|-------------------------------------------------------------|-----------------------|
| Nominal wattage                                             | 200.00 W              |
| Nominal voltage                                             | 220...240 V           |
| Mains frequency                                             | 50...60 Hz            |
| Nominal current                                             | 980 mA                |
| Inrush current                                              | 67 A                  |
| Inrush current time $T_{h50}$                               | 1000 $\mu$ s          |
| Max. number of luminaires per miniature circuit breaker B16 | 2                     |
| Max. number of luminaires per miniature circuit breaker C10 | 2                     |
| Max. number of luminaires per miniature circuit breaker C16 | 3                     |
| Power factor $\lambda$                                      | > 0.90                |
| Total harmonic distortion                                   | < 20 %                |
| Protection class                                            | I                     |
| Operating mode                                              | Integrated LED driver |

**Photometrical data**

|                                              |                           |
|----------------------------------------------|---------------------------|
| Luminous flux                                | 24400 lm                  |
| Luminous efficacy                            | 130 lm/W                  |
| Color temperature                            | 3000 K                    |
| Light color (designation)                    | Warm White                |
| Color rendering index Ra                     | > 80                      |
| Standard deviation of color matching         | $\leq 5$ sdc <sub>m</sub> |
| Luminous intensity                           | -                         |
| Low flicker                                  | Yes                       |
| Flickering metric (Pst LM)                   | -                         |
| Stroboscope effect metric (SVM)              | -                         |
| Photobiological safety group acc. to EN62778 | RG1                       |
| Beam angle                                   | 55 ° x 110 °              |

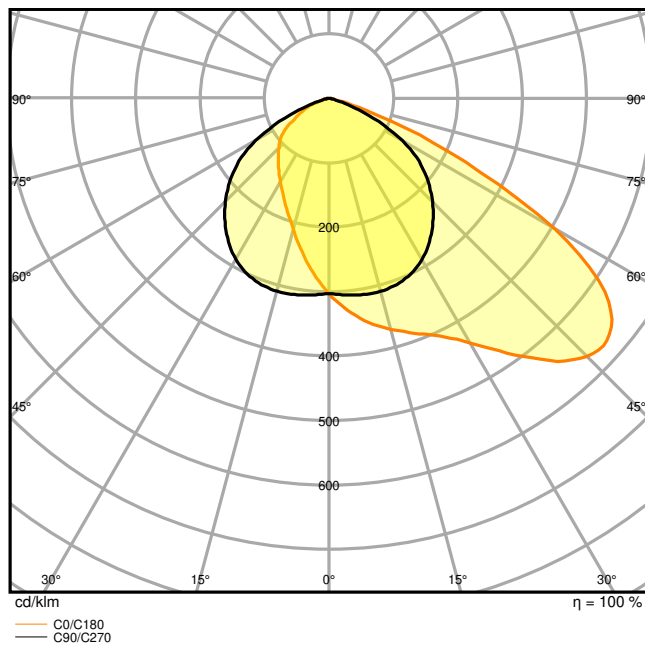


FL PFM 200W 3000K ASYM 55x110 BK

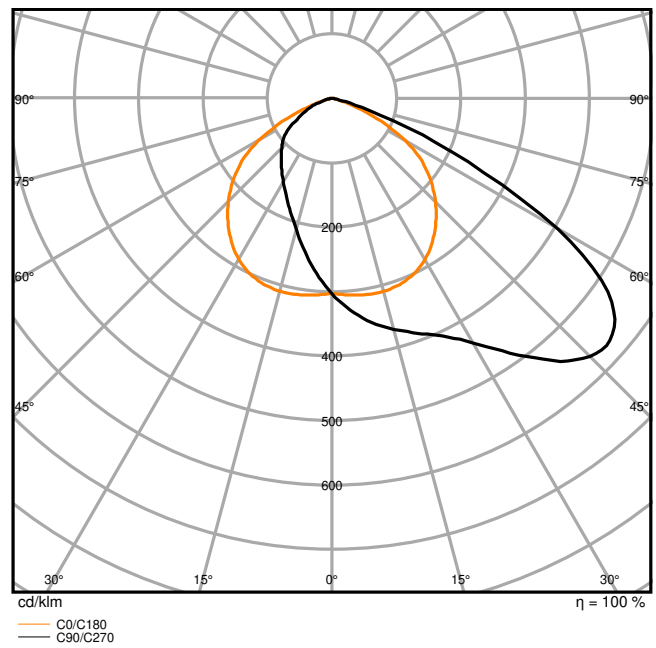

FL PFM 200W 3000K ASYM 55X110 BK

## Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 494.00 mm |
| Width          | 395.00 mm |
| Height         | 87.00 mm  |
| Product weight | 6300.00 g |
| Cable length   | 2000 mm   |



FL PFM 200W BK

## Materials & Colors

|                                            |          |
|--------------------------------------------|----------|
| Product color                              | Black    |
| Housing color                              | Black    |
| RAL Color (most similar)                   | RAL 9017 |
| Body material                              | Aluminum |
| Cover material                             | Glass    |
| Light emitting surface material            | Glass    |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C   |
| Mercury content                            | 0.0 mg   |

### Application & Mounting

|                                        |                               |
|----------------------------------------|-------------------------------|
| Ambient temperature range              | -30...+50 °C                  |
| Temperature range at storage           | -40...+70 °C                  |
| Type of connection                     | Cable, 3-pole                 |
| Type of protection                     | IP66                          |
| Protection class IK (shock resistance) | IK08                          |
| Dimmable                               | No                            |
| Mounting type                          | Surface                       |
| Mounting location                      | Wall / Pole / Floor / Ceiling |
| Application environment                | Outdoor                       |
| Adjustable                             | Yes                           |
| With light source                      | Yes                           |
| Replaceable light source               | No                            |

### Lifespan

|                            |                        |
|----------------------------|------------------------|
| Lifespan L70/B50 at 25 °C  | 100000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 70000 h <sup>1)</sup>  |
| Lifespan L80/B50 at 25 °C  | 70000 h                |
| Lifespan L90/B10 at 25 °C  | 30000 h                |
| Number of switching cycles | 100000                 |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

|                             |         |
|-----------------------------|---------|
| Output current              | 3850 mA |
| ECG - Output ripple current | < 10 %  |

### Certificates & Standards

|                                                      |                                |
|------------------------------------------------------|--------------------------------|
| Standards                                            | CE / CB / ENEC / TÜV SÜD / EAC |
| Luminaire with limited surface temperature, "D sign" | Yes                            |
| Ball shot safe                                       | No                             |
| Replaceable light source (EPREL)                     | Not replaceable                |

### Safety advice

- All electrical connections must be made by a qualified person.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire must be disposed of.
- Terminal block not included. Installation must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

### DOWNLOAD DATA

| Documents and certificates                                                         |                                        | Document name                       |
|------------------------------------------------------------------------------------|----------------------------------------|-------------------------------------|
|    | User instruction / safety instructions | FLOODLIGHT PERFORMANCE              |
|   | Legal information                      | LSI FL PFM SYM AND ASYM             |
|  | Legal information                      | Legal Insert FL PFM                 |
|  | Legal information                      | Informationstext 18 Abs 4 ElektroG  |
|  | Declarations of conformity             | EU Declaration of Conformity FL PFM |
|  | Declarations of conformity UKCA        | FL PFM BK                           |

| Photometric and lighting design files                                              |                     | Document name                    |
|------------------------------------------------------------------------------------|---------------------|----------------------------------|
|  | IES file (IES)      | FL PFM 200W 3000K ASYM 55x110 BK |
|  | IES file (IES)      | FL PFM 200W 3000K ASYM 55X110 BK |
|  | LDT file (Eulumdat) | FL PFM 200W 3000K ASYM 55x110 BK |
|  | LDT file (Eulumdat) | FL PFM 200W 3000K ASYM 55X110 BK |




| Photometric and lighting design files                                            |                                     | Document name                                         |
|----------------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------------|
|  | ULD file (DIALux)                   | FL PFM 200W-3000K ASYM 55x110 BK                      |
|  | ROLF file (RELUX)                   | FL PFM 200W-3000K ASYM                                |
|  | Light distribution curve type polar | FL PFM 200W 3000K ASYM 55x110 BK                      |
|  | Light distribution curve type polar | FL PFM 200W 3000K ASYM 55x110 BK                      |
| CAD/BIM files                                                                    |                                     | Document name                                         |
|  | BIM Revit 3D                        | FL PFM                                                |
|  | CAD STEP 3D                         | FL PFM 200W                                           |
| Tender texts                                                                     |                                     | Document name                                         |
|  | Tender documents                    | FLOODLIGHT PERFORMANCE ASYM 55x110 200 W 3000 K BK-EN |

## LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075353558 | Shipping box<br>1            | 568 mm x 140 mm x 430 mm             | 6878.00 g    | 34.19 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## ADDITIONAL CATALOG INFORMATION



## References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.